

Lexmark X646dte

Feature-rich intelligent MFP for demanding workgroups



LEXMARK

Lexmark X646dte


- Print, copy, scan and fax are standard features with output performance at up to 50 ppm
- Automatic two-sided printing, 40+ GB hard drive and 1,100 sheets input standard
- View a scanned document before sending, ensuring accuracy of critical documents
- Lexmark's enterprise security provides secure management, secure network communications and secure information storage

Key Message	Feature-rich intelligent MFP for demanding workgroups
In the Box	<ul style="list-style-type: none"> • X646dte MFP • 21,000-page Return Program Print Cartridge • 40+ GB Hard Drive • Automatic Two-sided Printing • Setup Sheet • Software and Documentation CD • Power Cord • RJ-11 Phone Cable
Part Number (US/Can.)	22G0530
Product Class	Workgroup laser MFP
Speed	
Print	up to 50 ppm (letter)
Copy	up to 55 ppm (letter)
Scan	Black: up to 35 ppm (letter); Color: up to 17 ppm (letter)
Time to First Page	As fast as 8.5 seconds
Resolution	Copy: 600 x 600 dpi; Print: 1200 x 1200 dpi, 2400 image quality printing, 600 x 600 dpi
Processor	533 MHz
Memory (std./max.)	256MB/768MB
Connectivity	
Standard	Print: USB, Ethernet; Scan: Ethernet; USB Direct Interface: Scan and Print; Card Reader: USB
Optional	Parallel, Serial, Wireless
Option Slots	DRAM DIMM slots: 1; ISP (INA) slots: 1; Firmware Card/Flash memory slots: 2
Printer Languages	PostScript 3, PCL 6, PPDS Migration Tool and direct PDF v1.5 printing
Fonts	PostScript: 158 scalable; PCL: 89 scalable including OCR-A, OCR-B and Code 3 of 9 bar codes, 2 bitmapped; PPDS: 39 scalable, 5 bitmapped
Operating Systems	Microsoft Windows, Mac, NetWare, UNIX and Linux
Acoustics	Printing: 56 dBA; Copying: 57 dBA; Scanning: 52 dBA; Idle: 30 dBA
Size (WxDxH)	22 in. x 26 in. x 33 in. (560 mm x 660 mm x 890 mm)
Weight	103 lb. (47 kg)
Paper Capacity	
Standard Input	1100 (500 + 500 + 100 MPF)
Maximum Input	4100 (500 + 500 + 500 + 500 + 2000 + 100 MPF)
Standard Output	500
Maximum Output	500
Paper Sources	
Standard Input	2
Maximum Input	7
Standard Output	1
Maximum Output	1
Media Information	
Types	Plain paper, paper labels, card stock, transparencies, envelopes, vinyl labels, polyester labels, Dual Web and Integrated labels
Size	Letter, Legal, A4, A5, JIS B5, Executive, Folio, Statement, Universal (2.75 in. x 5 in. to 8.5 in. x 14 in), envelopes (7 ³ / ₄ , 9, 10, DL, C5, B5)
Weight	Plain Paper: 16 to 47 lb. (60 to 176 g/m ²); Card stock: up to 110 lb. index (199 g/m ²)
Warranty	1-year OnSite Repair

Lexmark X646dte

Scanner Specifications	
Scanner Type	Color/Mono Flatbed with ADF
Max Optical Resolution	600 x 600 dpi (mono); 600 x 300 dpi (color)
Scan Area (flatbed)	8.5 in. X 14 in. (216 mm X 356 mm)
Scanner ADF	
Type	Single-pass Duplex with C-Path
Capacity	50 sheets at 20 lb. (75 g/m ²)
Media Weights	Minimum: 15 lb. (56 g/m ²); Maximum: 32 lb. (128 g/m ²)
Max Speed	Mono: Up to 35 spm; Color: Up to 17 spm
Scan Area (ADF)	Minimum: 4.5 in. x 5.5 in. (114 mm x 139.7 mm); Maximum: 8.5 in. x 14 in. (216 mm x 356 mm)
Fax Specifications	
Standard Fax Modem	Analog; 33.6 Bps max
Transmission Speed	Approximately 3 seconds per page
Speed Dials	Minimum 5,000 (based on 10-digit phone number)
Resolutions	200 x 100 dpi, 200 x 200 dpi, 300 x 300 dpi, 400 x 400 dpi

Paper Handling Options

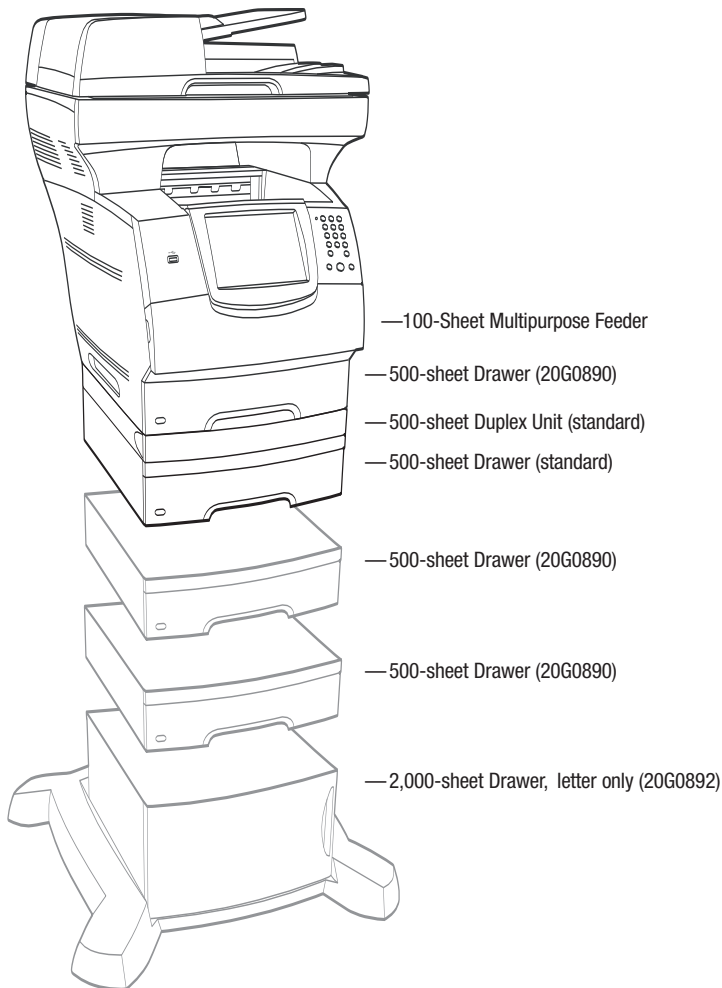

Options not pictured

- 250-sheet Drawer (20G0889)
- 250-sheet Tray (20G0879)
- 500-sheet Tray (20G0884)
- 250-sheet Universally Adjustable Drawer (20G1223)
- 400-sheet Universally Adjustable Drawer (20G1218)
- 250-sheet Universally Adjustable Tray (20G1224)
- 400-sheet Universally Adjustable Tray (20G1217)
- 85-sheet Envelope Feeder (20G0891)

Note

Also available is a basic model of this product that ships minus the duplex unit and the additional 500-sheet drawer, called the X646e (p/n 22G0325).

Supplies & Accessories

Part Number

Solutions	Font Cards (Double-Byte Character Set)	
	Traditional Chinese Font Card	1021242
	Japanese Font Card	1021243
	Korean Font Card	1021240
	Simplified Chinese Font Card	1021241
	Bar Code Card	22G0350
	PRESCRIBE Card	22G0354
	Card for IPDS and SCS/TNe	22G0351
Supplies	32,000-page Extra High Yield Return Program Print Cartridge ¹	X644X11A
	32,000-page Extra High Yield Return Program Print Cartridge for Label Applications ¹	X644X01A
	21,000-page High Yield Return Program Print Cartridge ¹	X644H11A
	21,000-page High Yield Return Program Print Cartridge for Label Applications ¹	X644H01A
	10,000-page Return Program Print Cartridge ¹	X644A11A
	32,000-page Extra High Yield Print Cartridge ¹	X644X21A
	21,000-page High Yield Print Cartridge ¹	X644H21A
	10,000-page Print Cartridge ¹	X644A21A
	Maintenance Items:	
	Separator Roll Kit	40X0454
	Pick Up Assembly	40X0453
	Pressure Pad Cushion	40X0466
	Charge Roll Kit	40X0127
	Transfer Roll Kit	40X0130
Label Fuser Wiper	40X2665	
Pick Tires	40X0070	
Media	Transparencies (letter)	70X7240
Furniture	Low Profile MFP Stand	16C0379
	MFP Stand with Cabinet	16C0369
	MFP Stand with Cabinet (10 in. high)	22G0551
	MFP Stand	16C0389
	Printer Base	22G0544
Connectivity	External Print Servers	
	N4050e Wireless 802.11g Print Server ²	14T0145
	Internal Print Servers ³	
	MarkNet N8020 Gigabit Ethernet	14S0200
	MarkNet N8030 Fiber Ethernet	14S0220
MarkNet N8050 802.11g Wireless	14S0165	
Adapters	Parallel 1284-B Interface Card	1021091
	RS-232C Serial Interface Card	1021092
Cables	10-foot Parallel Cable	1021231
	6-foot USB Cable	1021294
Memory options	128MB DRAM	13N1523
	256MB DRAM	13N1524
	512MB DRAM	13N1526
	32MB Flash Card	1021208
	64MB Flash Card	1021209

¹ Declared yield in accordance with ISO/IEC 19752.

² Requires USB connection

³ Use of an Internal Print Server disables the Ethernet card resident in the printer

