

# Lexmark C762

## Additional Accessories

Paper Handling Options	500-sheet Drawer	16N2300	
	2000-sheet Drawer w/Base	16N3600	
	500-sheet Tray	16N3601	
	Banner Tray	16N5000	
	Envelope Drawer	16N3100	
	Outdoor Media Drawer	16N3340	
	Output Expander	16N3050	
	5-bin Mailbox	16N3000	
	Duplex Unit	16N2400	
	Finisher S	16N3602	
	Finisher T	16N3603	
	Font Options	Traditional Chinese Font Card	10G0745
		Simplified Chinese Font Card	10G0744
Japanese Font Card		10G0746	
Korean Font Card		10G0743	
Optra Forms Solutions	Optra Forms Software (v4.3c)	11N0040	
	Optra Forms Director (v1.0)	11N0052	
	Optra Forms Manager	11N0056	
	Lexmark Forms 16MB Flash Card	10G0747	
	Lexmark Forms 32MB Flash Card	10G0748	
	Lexmark Forms Hard Disk, 5GB or larger w/ Adapter	12P0086	
	Optra Forms 2-Key Security	43H5841	
	Optra Forms 3-Key Security	43H5842	
Card Options	Lexmark C76X ImageQuick Card	16N3200	
	Lexmark C76X Bar Code Card	16N3201	
	Lexmark C76X Card for IPDS and SCS/TNe	16N3202	
	Lexmark C76X Card for PRESCRIBE Emulation	16N3205	
	Lexmark PrintCryption Card for C76X	16N3204	
External Print Servers	MarkNet X2011e Ethernet 10/100BaseTX - 1 port	46D0060	
	MarkNet X2012e Ethernet 10/100BaseTX/10 Base2 - 1 port	46D0040	
	MarkNet X2031e Ethernet 10/100BaseTX - 3 port	46D0020	
	MarkNet X2030t Token-Ring	46D0000	
	Lexmark N4000e Print Server	14T0030	
Internal Print Servers	MarkNet N2100t Token-Ring	14S0000	
	MarkNet N2101e Ethernet 10/100BaseTX	14S0020	
Wireless Connectivity	802.11g Wireless Print Adapter	1010042	
	Lexmark N4050e 802.11g Wireless (USB)	14T0145	
Adapters	External Serial Adapter (RS-232/422C)	1368705	
	Parallel 1284-B Interface Card	11K4601	
	RS-232 Serial Interface Card	11K4602	
Cables	Parallel 10 ft. cable	1329605	
	USB 2 meter cable	12A2405	
	Serial 50 ft. cable	1038693	
Furniture	Lexmark C760/C762 Printer Base	16N1708	

# Lexmark C762



- Banner size printing up to 8.5" x 36"
- 4800 Color Quality
- Color Care technology
- Built-in help pages

Lexmark, Lexmark with diamond design and LexOnSite are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. Optra Forms is a trademark of Lexmark International, Inc. Mac OS and the Mac logo are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. PCL is a registered trademark of Hewlett-Packard Company. The USB-IF logos are trademarks of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2004. Lexmark International, Inc. All rights reserved. 71K6531

**LEXMARK**<sup>™</sup>

# Lexmark C762



Broadest range of paper-handling options in its class, including 8.5 in. x 36 in. banner printing  
Control the cost of colour and usage with Lexmark Colour Care Technology  
Multifunction option adds scan, copy, e-mail and fax capabilities  
15,000-page high-yield print cartridges minimize user interface

## Lexmark C762, C762n, C762dn, C762dtn


### Product Specifications

Part Number	23B0000 (C762), 23B0050 (C762n), 23B0150 (C762dn), 23B0200 (C762dtn)	
Product Class	Medium/large workgroup color laser printer; Calibrated for PANTONE™ solid color simulation	
Speed	Black or Colour: up to 22.5 ppm	
Resolution	1200 x 1200 dpi, 4800 Colour Quality	
Time to First Page	Black: Less than 13.0 seconds; Colour: Less than 15.0 seconds	
Processor	C762: 500 MHz; C762n, C762dn, C762dtn: 600 MHz	
Memory (std./max.)	C762, C762n, C762dn: 128MB/512MB; C762dtn: 256MB/512MB	
Connectivity	Standard: C762: Parallel, USB, 1 internal solutions port (ISP) C762n, C762dn, C762dtn: Ethernet, USB, 1 ISP Optional: C762: Ethernet, Token-Ring, Serial, Wireless C762n, C762dn, C762dtn: Token-Ring, Parallel, Serial, Wireless Network Mgmt. Utility: MarkVision Professional	
Operating Systems	Windows, Linux, UNIX, Mac, NetWare and OS/400 For a complete list, visit <a href="http://www.lexmark.ca">www.lexmark.ca</a> .	
Printer Languages	PostScript 3 and PCL 6 emulations and direct PDF v1.2/v1.3 printing	
Fonts	PCL: 89 scalable, 2 bitmapped; PostScript: 158 scalable	
Size (WxDxH)	C762, C762n: 23.8 in x 18.5 in x 20.8 in (604.5 mm x 469.9 mm x 528.3 mm) C762dn: 23.8 in x 18.5 in x 24.3 in (604.5 mm x 469.9 mm x 617.2 mm) C762dtn: 23.8 in x 18.5 in x 28.9 in (604.5 mm x 469.9 mm x 734.1 mm)	
Weight	C762, C762n: 105 lb (47.7 kg) C762dn: 118.5 lb (53.8 kg) C762dtn: 132 lb. (60 kg)	
Acoustics	Printing: 52 dBA; Idle: 34 dBA	
Duty Cycle	Up to 100,000 pages per month	
Warranty	1-year LexOnSite™ Repair	

### Media Specifications

Paper Capacity (sheets)	C762, C762n, C762dn	C762dtn
Standard Input	600	1,100
Maximum Input	3,100	3,100
Standard Output	250	250
Maximum Output	3,900	3,900
Paper Sources	C762, C762n, C762dn	C762dtn
Standard Input	2	3
Maximum Input	5	5
Standard Output	1	1
Maximum Output	3	3
Media Types	Plain paper, card stock, transparencies, envelopes, vinyl labels <sup>1</sup> ; paper labels, polyester labels, dual-web labels, integrate labels, banner paper	
Media Sizes	Letter, A4, A5, JIS B5, statement, letter, folio, legal, executive, universal (2.75 x 5 in. to 8.5 x 14 in.), envelopes (7 3/4, 9, 10, DL, C5, B5), banner (8.5 x 36 in.)	
Media Weights	Plain paper: 16-47 lb. (60-176 g/m <sup>2</sup> ); Card stock: Up to 110 lb. Index (up to 210 g/m <sup>2</sup> ); Labels: 48-92 lb. (180-300 g/m <sup>2</sup> )	

### In the Box



Lexmark C762  
Lexmark C762 Printer  
6,000-page Cyan, Magenta, Yellow and Black Print Cartridges  
Power Cord  
Publications CD  
Drivers, MarkVision and Utilities CD

Lexmark C762n  
Lexmark C762  
EXCEPT  
Ethernet (instead of parallel)  
600 MHz processor (instead of 500 MHz)


Lexmark C762dn  
Lexmark C762n  
PLUS  
Automatic two-sided printing

Lexmark C762dtn  
Lexmark C762dn  
PLUS  
Additional 128MB memory (256MB total)  
Additional 500-sheet drawer

### Supplies & Accessories

Supplies <sup>2</sup>	15,000-page High Yield Return Program Black Print Cartridge	15G042K
	15,000-page High Yield Return Program Cyan Print Cartridge	15G042C
	15,000-page High Yield Return Program Magenta Print Cartridge	15G042M
	15,000-page High Yield Return Program Yellow Print Cartridge	15G042Y
	15,000-page High Yield Black Print Cartridge	15G032K
	15,000-page High Yield Cyan Print Cartridge	15G032C
	15,000-page High Yield Magenta Print Cartridge	15G032M
	15,000-page High Yield Yellow Print Cartridge	15G032Y
	6000-page Return Program Black Print Cartridge	15G041K
	6000-page Return Program Cyan Print Cartridge	15G041C
	6000-page Return Program Magenta Print Cartridge	15G041M
	6000-page Return Program Yellow Print Cartridge	15G041Y
	6000-page Black Print Cartridge	15G031K
	6000-page Cyan Print Cartridge	15G031C
	6000-page Magenta Print Cartridge	15G031M
	6000-page Yellow Print Cartridge	15G031Y
	Toner Waste Container	10B3100
	Routine Maintenance Items:	
	ITU Maintenance Kit with Transfer Roll	56P2848
	115V Fuser Maintenance Kit	56P2910
Memory/Flash Options	64MB SDRAM	11N0023
	128MB SDRAM	11N0025
	256MB SDRAM	11N0036
	512MB SDRAM	12N0847
	16MB Flash Card <sup>3</sup>	11K4616
	32MB Flash Card <sup>3</sup>	11K4632
	20+GB Hard Disk with Adapter	12N1262

### Paper Handling Options<sup>3</sup>

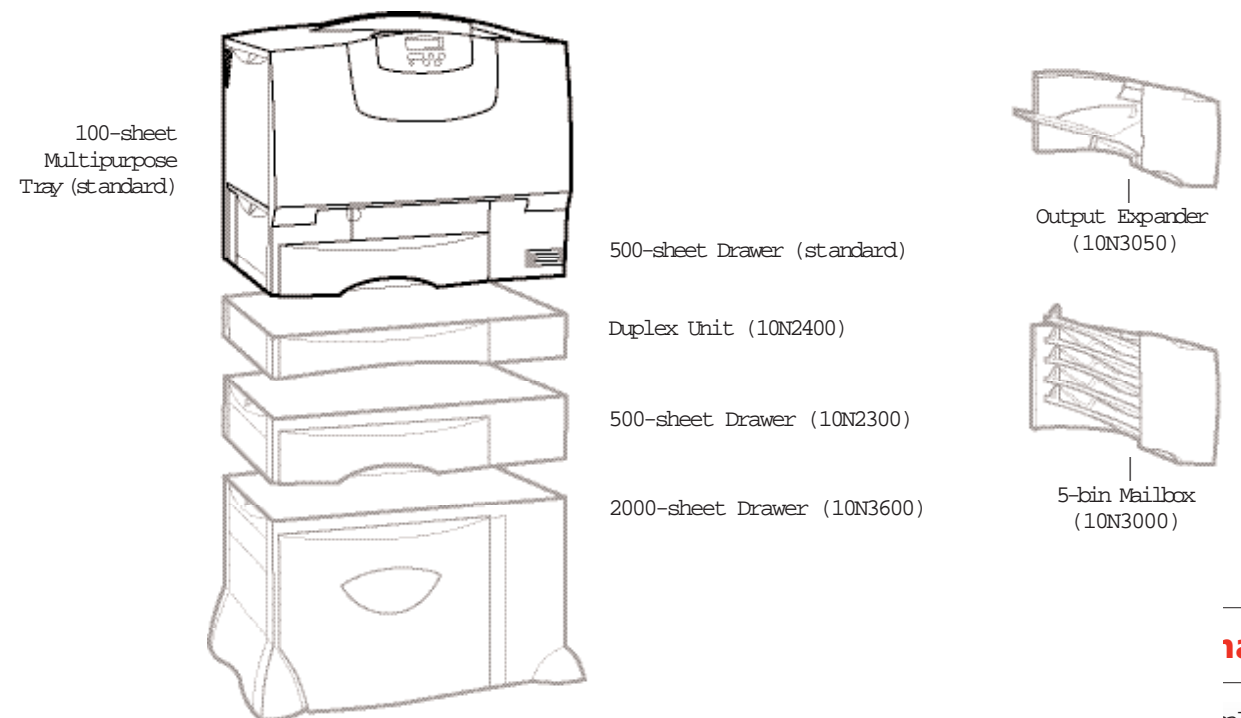

Options not pictured:  
500-sheet Tray (10N3601)  
Banner Tray (10N5000)  
Envelope Drawer (10N3100)

Outdoor Media Drawer (10N3340)  
Printer Base (10N1708)

### ation

<sup>1</sup> Requires vinyl bag. Special web oiler required for heavy usage  
<sup>2</sup> Yield is based on approximately 5% print coverage for monochrome, 20% for color  
<sup>3</sup> One flash memory slot and one applications slot available  
<sup>4</sup> Displays all available options for base model